



## Amerex Corporation

### RUGGED

- 5 Year Warranty
- All Metal Valve Construction
- Rust free aluminum cylinders
- Durable High Gloss Polyester Powder Paint
- Temperature Range -22°F to 120°F

### USER FRIENDLY

- Meets Many Hospital Medical Equipment Requirements
- Large Loop Stainless Steel Pull Pin
- Model 322NM Independently Tested and Approved for use in MRI Facilities to 7 Tesla
- Model 322NM Has Sanitary White Paint Finish (easy to clean)
- Bar Coded and Bi-lingual Labels


### OPTION

- USCG Approved with Bracket Listed on UL Label



### MODELS

322    330  
331    332

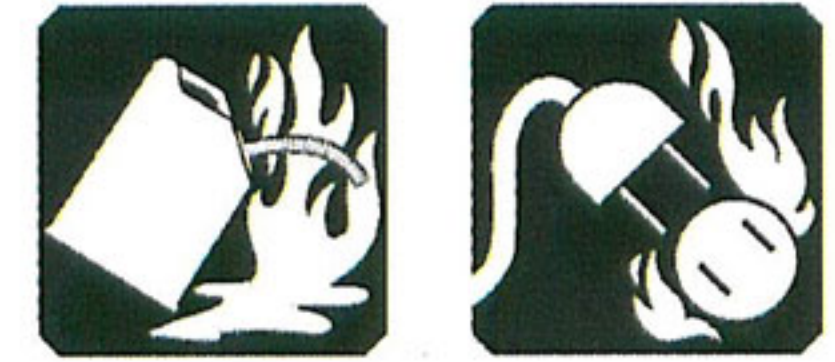

Also available in 50 / 100 lb. wheeled extinguishers and 100 lb. stationary.

**Model 322NM  
NONMAGNETIC  
MRI SAFE TO 7 TESLA  
(USES 17737 WALL HANGER - INCLUDED)**



**CARBON DIOXIDE** is discharged as a white cloud of "snow" which smothers a fire by eliminating oxygen. It is effective for Class B flammable liquids and is electrically non-conductive. Carbon Dioxide is a clean, non-contaminating, odorless gas.

**Nonmagnetic model available (Model 322NM - tested to 7 Tesla)**

AGENT TYPE	CARBON DIOXIDE				
VALVE TYPE	CHROME PLATED BRASS				
DESIGN	HORN		HOSE & HORN		
MODEL NUMBER	322	322NM	330	331	332
UL RATING	5B:C	5B:C	10B:C	10B:C	10B:C
CAPACITY (LBS.)	5	5	10	15	20
SHIPPING WT. (LBS.)	14	14	28.25	37.75	50.75
HEIGHT (IN.)	17.75	17.75	24	30	30
WIDTH (IN.)	8.25	8.25	12	12	13
DEPTH (IN.)	5.25	5.25	7	7	8
RANGE (INITIAL- FT)	3-8	3-8	3-8	3-8	3-8
DISCHARGE TIME (SEC.)	10	10	10	12.5	19
FM APPROVED	YES	YES	YES	YES	YES
INCLUDED BRACKET	WALL	NM WALL	WALL	WALL	WALL

**Manufactured and Tested to ANSI/UL Standards  
Complies with NFPA 10 Standard  
ISO-9001 / ISO-14001 Certified  
UL LISTED**

### CONFORMS TO TEST STANDARDS:

CAN/ULC-S503 - ANSI/UL 154 &  
CAN/ULC-S508 - ANSI/UL 711

**MADE IN U.S.A.**